




Installation Instructions for 450-43LE Solenoids

Rostra Precision Controls, 2519 Dana, Dr., Laurinburg, NC 28352 800-782-3379 www.rostra.com

1. Remove old solenoids.
2. Insert new solenoid assemblies into valve body.
3. Plug in original wire harness as shown in illustration.

NOTE: Be aware that the solenoid may rotate during normal operation. Position lead wires away from moving parts.

4. Slide mounting bracket over locating post on solenoid.
5. While holding mounting bracket in position, attach black ground wire and mounting bolt to valve body. Make sure solenoid and bracket are correctly positioned before tightening mounting bolts.

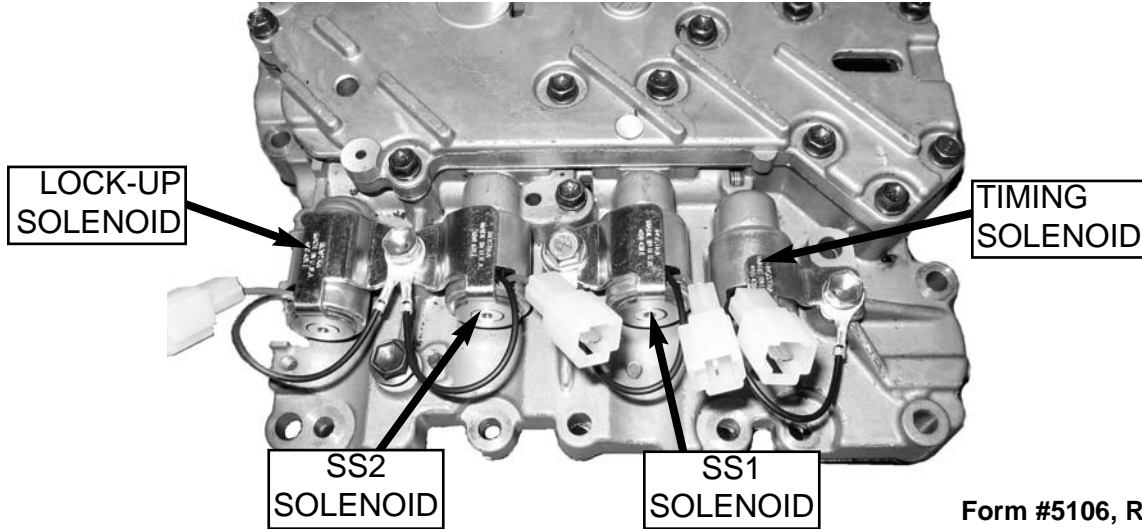

Form #5106, Rev. RTP, 08-29-07




Installation Instructions for 450-43LE Solenoids

Rostra Precision Controls, 2519 Dana, Dr., Laurinburg, NC 28352 800-782-3379 www.rostra.com

1. Remove old solenoids.
2. Insert new solenoid assemblies into valve body.
3. Plug in original wire harness as shown in illustration.

NOTE: Be aware that the solenoid may rotate during normal operation. Position lead wires away from moving parts.

4. Slide mounting bracket over locating post on solenoid.
5. While holding mounting bracket in position, attach black ground wire and mounting bolt to valve body. Make sure solenoid and bracket are correctly positioned before tightening mounting bolts.

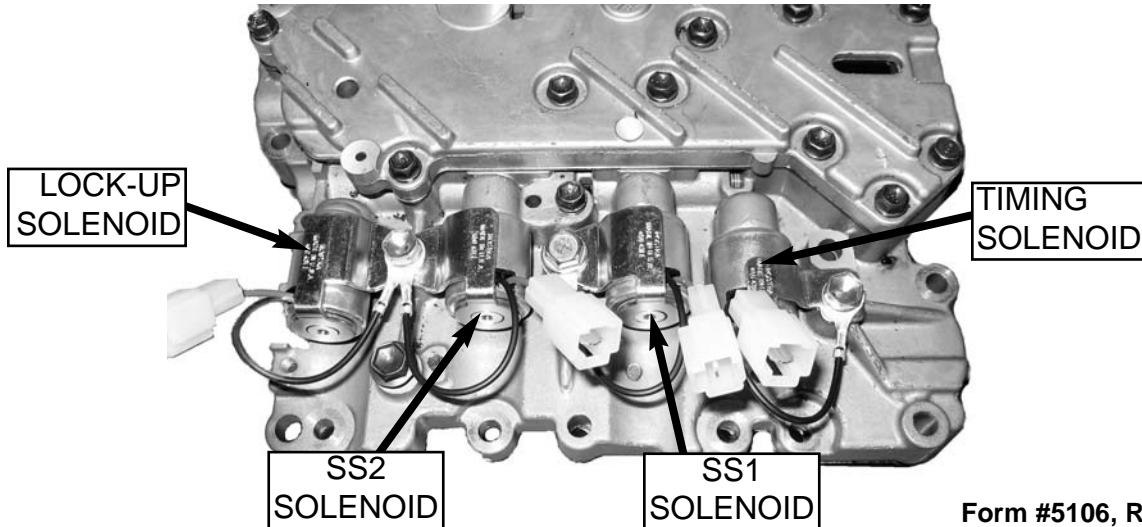

Form #5106, Rev. RTP, 08-29-07